

## Art Number

WMR-6060-XX-36-120/54

## Model

36W

WMR-6060-XX-40-120/54

40W



## Features

Backlit series adopts high lumen SMD led as a light source  
Backlit slim square panel light can best replacement for traditional Tube light  
Weight:195g for 6060;Better and evenly surface treatment and better visual effect


Back plate Thickness:0.25mm;Flat and evenly after screws fixed;Spraying treatment,Better for PCBA adhesive

Thickness:0.8mm;PS diffuser,strong and smooth

Uniformity light effect


## Product Specification

LED Chip	SMD LED
Power	36W/ 40W
Input	220-240VAC Remote Driver
Lumen	4320lm/ 4800lm
CCT	3000K(30)/ 4000K(40)/ 5000K(50)
Driver	Philips/ Tridonic

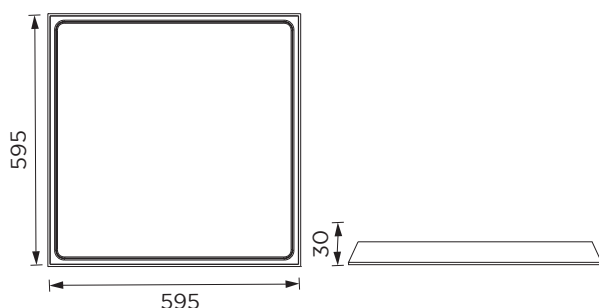

## Photometric Light Distribution

36W



## Technical Data

IP Rating	IP54
Housing	Powder Coated extruded Aluminum
Black Plate	Poder Coated Iron
Diffuser	PC
Finishing	White(02)/ Black(04)
Mounting	Suspended/ Recessed/ Surfaces
Power Factor	PF>0.9

## Photometric Data

CRI	80
Luminous Efficacy	120lm/W
Beam Angle	110°(110)
Operating Temp.	-20°C-+40°

## Order Code Example

Code	Size	Color Temp	Power	Efficacy	IP Rating
WMR	60x60(6060)	3000K(30)	36W(36)	120lm/W(120)	IP54(54)
WMR-6060-30-36-120/54					