

Art Number	Model
WMR-6060-XX-25-140/54	25W
WMR-6060-XX-36-140/54	36W
WMR-6060-XX-40-140/54	40W




Features

Backlit series adopts high lumen SMD led as a light source
 Backlit slim square panel light can best replacement for traditional Tube light
 Weight:195g for 6060;Better and evenly surface treatment and better visual effect
 Back plate Thickness:0.25mm;Flat and evenly after screws fixed;Spraying treatment,Better for PCBA adhesive
 Thickness:0.8mm;PS diffuser,strong and smooth
 Uniformity light effect

Product Specification

LED Chip	SMD LED
Power	25W/ 36W/ 40W
Input	220-240VAC Remote Driver
Lumen	3500lm/ 5040lm/ 5600lm
CCT	3000K(30)/ 4000K(40)/ 5000K(50)
Driver	Philips/ Tridonic

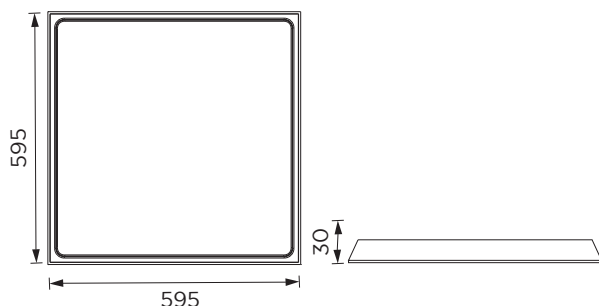

Technical Data

IP Rating	IP54
Housing	Powder Coated extruded Aluminum
Black Plate	Poder Coated Iron
Diffuser	PC
Finishing	White(02)/ Black(04)
Mounting	Suspended/ Recessed/ Surfaces
Power Factor	PF>0.9

Photometric Data

CRI	80
Luminous Efficacy	140lm/W
Beam Angle	110°(110)
Operating Temp.	-20°C-+40°

Order Code Example

Code	Size	Color Temp	Power	Efficacy	IP Rating
WMR	60x60(6060)	3000K(30)	25W(25)	140lm/W(140)	IP54(54)
WMR-6060-30-25-140/54					