

SERIES ECO V2

Industrial light 100W IP65

Art Number WL441000
Model 100W 220-240VAC



Features


LED high bay with super high light efficiency up to 170lm/w
 Body and heat sink made with aluminum die cast for the high heat dissipation
 Special surface treatment adopts powder spary process which has strong texture and corrosion resistance.
 Variety od options of working voltage nis available to fulfill the requirements all over the world.
 Ripple like lens cover diffuses the dazdling light generated by individual leds and shed a gentle beam creating a harmonious.
 Glare control UGR <25

Product Specification


LED Chip	SAMSUNG/ SEOUL Semi conductor
Power	100W
Input	220-240 VAC
Output	13000lm
CCT	3000K(30)/ 4000K(40)/ 6000K(60)/ 6500K(65)
Driver	Lifud/ Meanwell

Technical Data

IP Rating	IP65
IK Rate	IK10
Housing	Die cast aluminum
Finishing	Powder coated black PAB (04)
Lens	Polycarbonate
Power Cable	H05RN-F 3x0.75 mm ² / L=0.5m (high voltage)
Mounting	Aluminum

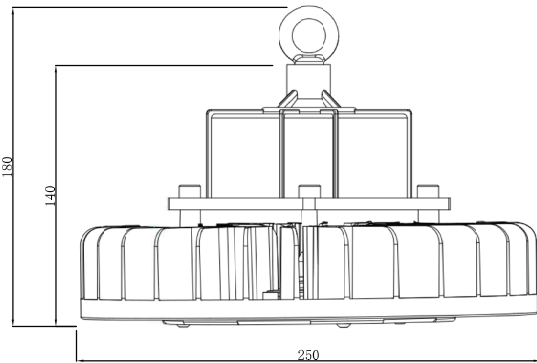

Photometric Data

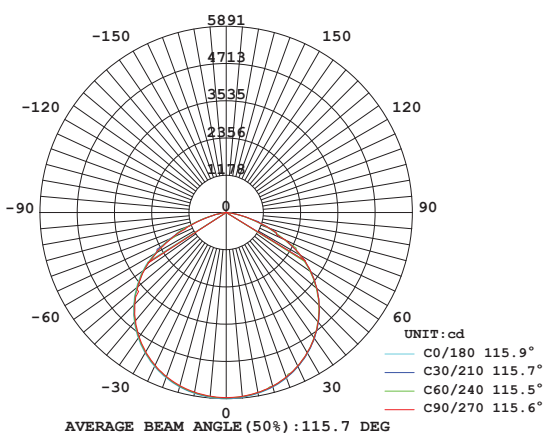

Photometric Data

CRI	80
Luminous Eficacy	130lm/W
Beam Angle	60°(60)/ 90°(90)/ 110°(110)
Operating Temp.	-30°C-+50°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL441000	PAB(04)	60°(60)	3000K(30)
WL441000.04.60.30			