


Art Number	Model
WL441020	50W 100-240VAC
WL441021	60W 100-240VAC



## Features

- SKYLIGHT series canopy light adopt with Philips 3030 2D lumiled as light source with high efficiency up to 125-130lm/w
- Body made with stretched aluminum and PC lens as cover.
- Special surface treatment adopts with a non corrosive material for exquisite appearance and corrosion resistance.
- Variety od options of working voltage nis available to fulfill the requirements all over the world.
- Reasonable heat sink design with ventilation to avoid laceration.
- Gaps between each modules are increased heat dissipation speed and ssolved the problem of sut deposition.
- Designes to last at least 100,000 hours @L70

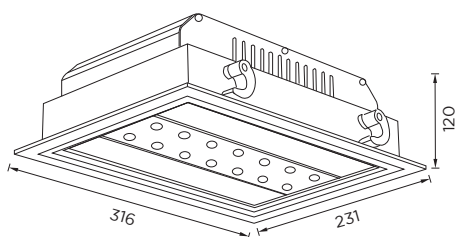


## Product Specification

LED Chip	Philips Lumiled 3030 2D
Power	50W/ 60W
Input	100-240 VAC
Output	6500lm/ 7500lm
CCT	3000K(30)/ 4000K(40)/ 5000K(50)/ 5700K(57)
Driver	Meanwell HLG Series

## Technical Data

IP Rating	IP66
IK Rate	IK10
Housing	Stretched aluminum
Finishing	Silver(80)
Lens	PC (UV Resistance)
Power Cable	H05RN-F 3x0.75 mm <sup>2</sup> / L=0.5m (high voltage)
Mounting	Aluminum Frame holder
Power Factor	>0.95
THD	<20%
Cut out	202x285
Weight	2.4Kg

## Light Distribution Curve

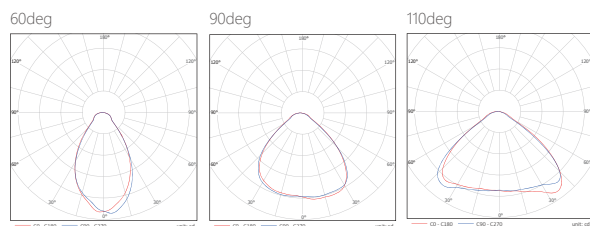

## Photometric Data

CRI	80
Luminous Efficacy	130lm/W- 125lm/W
Beam Angle	60°(60)/ 90°(90)/ 110°(110)
Operating Temp.	-30°C-+50°

## Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL441020	SLV(08)	60°(60)	3000K(30)
WL441020.08.60.30			