


Art Number	Model
WL771003	150W RGB
WL771002	200W RGBW

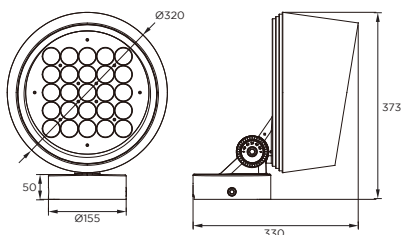

## Features

FEAT series flood light adopt american CREE original LED as light source with high lumen output which gives excellent consistency of light color. Adopts patent owned design, fashion and beautiful appearance. Adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light. Luminaire made with high pressure die casting aluminum surface with fluorine carbon spaying. Luminaire shade adopts high strength toughened glass, resist the impact and friction. Constant current driver with PWM grey control installed inside, Powerful DMX12 interface adopts high reliable bus connect, all has the function of automatic addressing.

## Product Specification

LED Chip	CREE LED
Power	150W/ 200W
Input	100-240 VAC, 50/60Hz
Lumen	6750lm/ 9400lm
CCT	RGB/ RGBW
Power Factor	>0.95
Control Method	DMX512

## Technical Data

IP Rating	IP66
Housing	Die cast aluminum
Heat sink	Die cast aluminum
Finishing	Grey (06)
Front Cover	Tempered glass
Light Distribution	PMMA optical
Power Cable	H05RN-F 3x0.75 mm <sup>2</sup> / L=0.5m (high voltage)
Mounting	Floor Surface

## Photometric Data

Luminous Efficacy	45lm-47lm/W
Beam Angle	5°(5)/ 8°(8)/ 12.5°(12.5)/ 30°(30)/ 10x60°(A3) RGB 15°(15)/ 20°(20)/ 30°(30)/ 15x60°(A11) RGBW
Operating Temp.	-25°C-+50°C

## Mounting Options



## Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL771017	AGS(06)	60°(60)	3000K(30)
WL771017.06.60.30			