

Art Number

WL771012

WL771013

Model

30W Single Color

30W RGBW



Features

FEAT series flood light adopt american CREE original LED as light source with high lumen output which gives excellent consistency of light color

Adopts patent owned design, fashion and beautiful appearance.

Adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light

Luminaire made with high pressure die casting aluminum surface with fluorine carbon spaying.


Luminaire shade adopts high strength toughened glass, resist the impact and friction

Constant current driver with PWM grey control installed inside,

Powerful DMX12 interface adopts high reliable bus connect, all has the function of automatic addressing

Product Specification

LED Chip	CREE LED
Power	30W
Input	100-240 VAC, 50/60Hz
Lumen	3300lm/ 1410lm(RGBW)
CCT	2700K/ 3000K/ 4000K/ 5000K
Power Factor	>0.95
Control Method	ON/OFF, DMX512

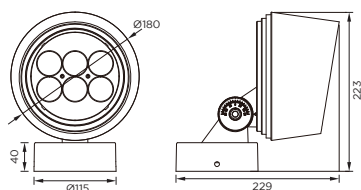

Technical Data

IP Rating	IP66
Housing	Die cast aluminum
Heat sink	Die cast aluminum
Finishing	Grey (06)
Front Cover	Tempered glass
Light Distribution	PMMA optical
Power Cable	H05RN-F 3x0.75 mm ² / L=0.5m (high voltage)
Mounting	Floor Surface

Photometric Data

CRI	>80
Luminous Efficacy	110lm/W, 47lm/W(RGBW)
Beam Angle	[2.6°(2.6)/ 3.5°(3.5)/ 12°(12)/ 20°(20) / 30°(30)/ 60°(60)/ 10x70°(A12)/ 5x20°(A13)] [15°(15)/ 20°(20)/ 30°(30)/ 15x60°(A11)RGBW]
Operating Temp.	-25°C~+50°C

Mounting Options



Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL771012	AGS(06)	60°(60)	3000K(30)
WL771017.06.60.30			