

Art Number WL771018
Model 150W 220-240VAC



Features

- Available variety of mounting accessories along with the luminaires such as wall mounted, ceiling mounted, pole mounted and ground mounted
- Wide range of lumen output from 130lm to 140lm
- User friendly driver compartment with built in
- Available in different dimming options such as DALI/ 1-10V
- Available in 100W/150W/200W/250W/300W

Product Specification

| | |
|--------------|--------------------------------------------|
| LED Chip | PHILIPS LED |
| Power | 150W |
| Input | 220-240 VAC, 50/60Hz |
| Output | 19500lm(A18)/ 20250lm(60°)/ 21000lm(110°) |
| CCT | 3000K(30)/ 4000K(40)/ 5000K(50)/ 6000K(60) |
| Power Factor | >0.95 |
| Driver | Philips |


Technical Data

| | |
|-------------|--------------------------------------------------------|
| IP Rating | IP66 |
| IK Rate | IK08 |
| Housing | Die cast aluminum |
| Heat sink | Die cast aluminum |
| Finishing | Anodised grey (06) |
| Lens | Polycarbonate tempered glass |
| Power Cable | H05RN-F 3x0.75 mm ² / L=0.5m (high voltage) |
| Mounting | SPCC |

Light Distribution Curve



Accessories

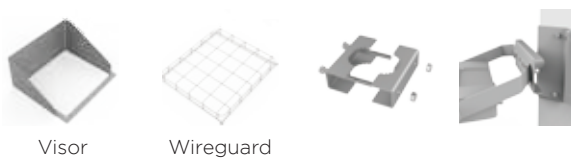

Photometric Data

| | |
|-------------------|-----------------------------------|
| CRI | 70 |
| Luminous Efficacy | 130lm-140lm/W |
| Beam Angle | 60°(60)/ 110°(110)/ 80°x130°(A18) |
| Operating Temp. | -30°C-+50° |

Order Code Example

| | | | |
|-------------------|---------|------------|------------|
| Artnumber | Finish | Beam Angle | Color Temp |
| WL771018 | AGS(06) | 60°(60) | 3000K(30) |
| WL771018.06.60.30 | | | |