

**Art Number** WL771021 **Model** 300W 220-240VAC



## Features

- Available variety of mounting accessories along with the luminaires such as wall mounted, ceiling mounted, pole mounted and ground mounted
- Wide range of lumen output from 130lm to 140lm
- User friendly driver compartment with built in
- Available in different dimming options such as DALI/ 1-10V
- Available in 100W/150W/200W/250W/300W


## Product Specification

LED Chip	PHILIPS LED
Power	300W
Input	100-240 VAC
Output	39000lm(A18)/ 39000lm(60°)/ 40500lm(110°)/ 42000lm(A19)
CCT	3000K(30)/ 4000K(40)/ 5000K(50)/ 6000K(60)
Power Factor	>0.95
Driver	Philips


## Technical Data

IP Rating	IP66
IK Rate	IK08
Housing	Die cast aluminum
Heat sink	Die cast aluminum
Finishing	Anodised grey (06)
Lens	Polycarbonate tempered glass
Power Cable	H05RN-F 3x0.75 mm <sup>2</sup> / L=0.5m (high voltage)
Mounting	SPCC

## Light Distribution Curve

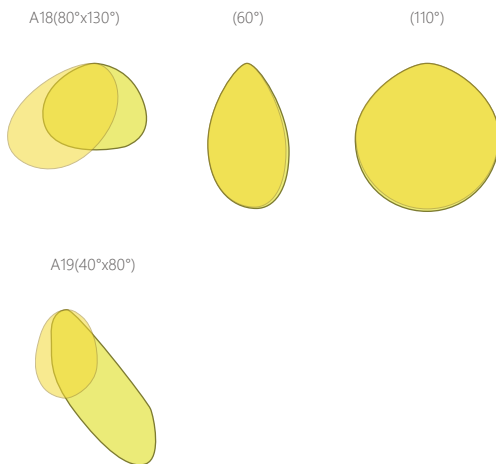

## Accessories

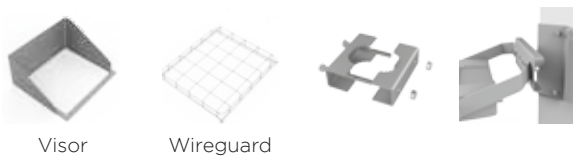

## Photometric Data

CRI	70
Luminous Efficacy	130lm-140lm/W
Beam Angle	60°(60)/ 110°(110)/ 80°x130°(A18)/ 40°x80°(A19)
Operating Temp.	-30°C-+50°

## Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL771021	AGS(06)	60°(60)	3000K(30)
WL771021.06.60.30			