
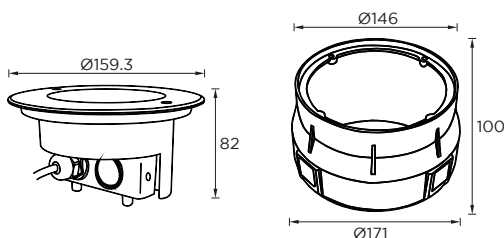


Art Number	Model
WL881003	24VDC Single Color
WL881004	24VDC RGB 3 in 1
WL881005	240VAC Single Color



Features

- Deliver light to permanent and semi-permanent installation such as side walks, large mature trees, walls and flagpoles.
- Easy install in any hardscaping material and is designed to weather the elements, car tires and foot traffic.
- RGB 3 in 1 available
- Dimmable support: Triac. PWM/ 1-10V/ Dali/ DMX512
- IP67 waterproof outdoor
- Stainless steel front cover/ CNC aluminum lighting body
- Incl. PVC mounting sleeve

Product Specification

LED Chip	CREE LED
Power	6x3W
Input	24VDC/ 240VAC
Output	1440lm
CCT	3000K(30)/ 4000K(40)/ 6000K(60)/ RGB 3 IN 1(07)
LED Qty	6 LED


Technical Data

IP Rating	IP67
IK Rate	IK10
Housing/ Front Cover	Powder Coated Aluminum/Stainless steel #316
Finishing	Stainless steel #316 (18)
Light Window	Tempered step glass
Power Cable	H05RN-F 2x0.75 mm ² / L=0.5m (low voltage) H05RN-F 3x0.75 mm ² / L=0.5m (high voltage) H05RN-F 4x0.75 mm ² / L=0.5m (RGB PWM)
Mounting Sleeve	PVC Plastic
Load Capacity	Full Area = 2600Kg-30Km/h
Weight	1.7Kg
Package	4pcs/CTN

Photometric Data

CRI	80
Luminous Efficacy	80lm/W
Beam Angle	6°(6)/ 10°(10)/ 15°(15)/ 25°(25)/ 45°(45)/ 60°(60) (Symmetric) 30°x45°(A1) (Asymmetric)
Operating Temp.	-20°C~+50°

18W 3000K 10°

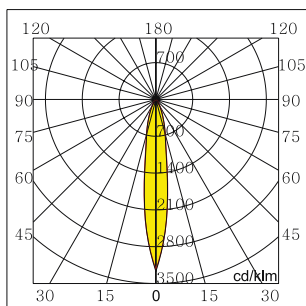

H[m]	D[m]	MaxLux	MedLux	
1.00	0.28	1847	1140	
2.00	0.56	462	285	
3.00	0.84	205	127	
4.00	1.12	115	71	
5.00	1.40	74	46	

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL881003	SS(09)	15°(15)	3000K(30)
WL881003.09.15.30			