

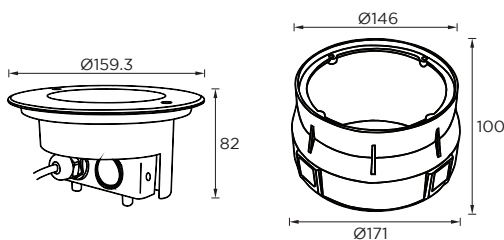


Art Number	Model
WL881009	24VDC Single Color
WL881010	240VAC Single Color
WL881011	24VDC RGB 3 in 1



27W 3000K 30°



H[m]	D[m]	MaxLux	MedLux	
1.00	0.57	5138	3084	
2.00	1.14	1284	771	
3.00	1.71	571	343	
4.00	2.28	321	193	
5.00	2.84	206	123	

Features

- Deliver light to permanent and semi-permanent installation such as side walks, large mature trees, walls and flagpoles.
- Easy install in any hardscaping material and is designed to weather the elements, car tires and foot traffic.
- RGB 3 in 1 available
- Dimmable support: Triac. PWM/ 1-10V/ Dali/ DMX512
- IP67 waterproof outdoor
- Stainless steel front cover/ CNC aluminum lighting body
- Incl. PVC mounting sleeve

Product Specification

LED Chip	CREE LED
Power	9x3W
Input	24VDC/ 240VAC
Output	2160lm
CCT	3000K(30)/ 4000K(40)/ 6000K(60)/ RGB 3 IN 1(07)
LED Qty	9 LED

Technical Data

IP Rating	IP67
IK Rate	IK10
Housing/ Front Cover	Powder coated aluminum/Stainless steel #316
Finishing	Stainless steel #316 (18)
Light Window	Tempered step glass
Power Cable	H05RN-F 2x0.75 mm ² / L=0.5m (low voltage) H05RN-F 3x0.75 mm ² / L=0.5m (high voltage) H05RN-F 4x0.75 mm ² / L=0.5m (RGB PWM)
Mounting Sleeve	PVC Plastic
Load Capacity	Full Area = 2600Kg-30Km/h
Weight	1.7Kg
Package	4pcs/CTN

Photometric Data

CRI	80
Luminous Efficacy	80lm/W
Beam Angle	6°(6)/ 15°(15)/ 25°(25)/ 30°(30)/ 45°(45)/ 60°(60) (Symmetric) 30°x45°(A1) (Asymmetric)
Operating Temp.	-20°C~+50°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL881009	SS(09)	15°(15)	3000K(30)
WL881009.09.15.30			