
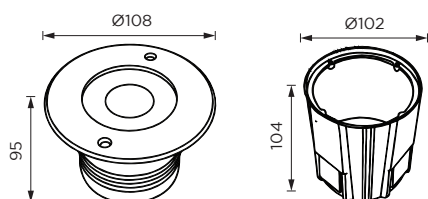


Art Number	Model	
WL881025	24VDC	RGBW 4 in 1
WL881100	100-240VAC	Single Color



Features

- Deliver light to permanent and semi-permanent installation such as side walks, large mature trees, walls and flagpoles.
- Easy install in any hardscaping material and is designed to weather the elements, car tires and foot traffic.
- Dimmable support: Triac. PWM/ 1-10V/ Dali/ DMX512
- IP67 waterproof outdoor
- Stainless steel front cover/ CNC aluminum lighting body
- Incl. PVC mounting sleeve


Product Specification

LED Chip	CREE LED
Power	12W
Input	100-240VAC/ 24VDC(RGBW)
Lumen	960lm/ 540lm(RGBW)
CCT	2700K(27)/ 3000K(30)/ 4000K(40)/ 5000K(50)
	RGBW 4 IN 1(03)
LED Qty	1 LED


Technical Data

IP Rating	IP67
IK Rate	IK09
Housing/ Front Cover	Powder Coated aluminum/Stainless steel #316
Finishing	Stainless steel #316 (18)
Light Window	Tempered step glass
Power Cable	H05RN-F 5x0.75 mm ² / L=0.5m (RGBW PWM) H05RN-F 6x0.75 mm ² / L=0.5m (RGBW DMX)
Mounting Sleeve	PVC Plastic
Load Capacity	Full Area = 2500Kg

Photometric

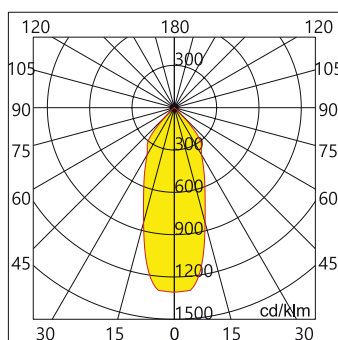

H[m]	D[m]	MaxLux	MedLux	
0.40	0.20	3586	2158	
0.80	0.40	896	540	
1.20	0.60	398	240	
1.60	0.81	224	135	
2.00	1.01	143	86	



Photometric Data

CRI	80
Efficacy	80lm/W(Single) - 45lm/W(RGBW)
Beam Angle	[12°(12)/ 24°(24)/ 36°(36) Single] [15°(15)/ 25°(25)/ 45°(45) RGBW]
Operating Temp.	-20°C~+50°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL881012	SS(09)	15°(15)	RGBW(03)
WL881012.09.15.30			