



Art Number	Model
WL891008	2x20W 100-240VAC
WL891009	20W 100-240VAC

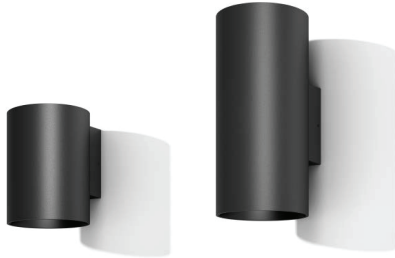

## Features

RUEN series up & down led wall light adopt Cree LED with integrated power unit with direct plugin.

Designed in simple looking and body made with die cast aluminum alloy, extruded aluminum profile with clear tempered glass window.

This luminaire with very narrow beam light distribution allows to highlight the pillars and walls.

IP65 fixture is suitable in indoor, outdoor and architectural lighting application.

Dimmable Support: Triac/ PWM/ 1-10V/ Dali

## Product Specification

LED Chip	CREE
Power	20W/ 2x20W
Input	100-240VAC
Output	[1200lm(20W)] [2400lm(2x20W)]
CCT	2700K(27)/ 3000K(30)/ 4000K(40)/ 5000K(50)
LED Type	COB

## Technical Data

Power factor	>0.9
IP Rating	IP65
IK Rating	IK06
Housing	Die cast aluminum alloy, Extruded aluminum profile
Finishing	White(02)/ Black(04)/ Grey(06)
Diffuser	Clear Tempered Glass
Power Cable	H05RN-F 3x0.75 mm <sup>2</sup> / L=0.5m

## Photometric Data

CRI	80
Luminous Efficacy	60lm/W
Beam Angle	15°(75)
Operating Temp.	-20°C-+50°

## Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL891008	WH(02)	15°(75)	3000K(30)
WL891008.02.15.30			