




Art Number	Model
WL551014	100-240VAC Single Color
WL551015	24VDC Single Color

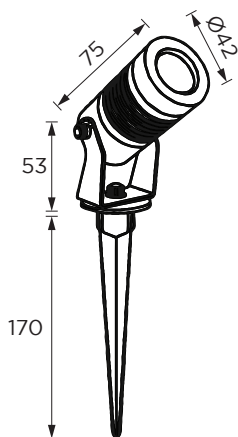

### Features

GLADIS series garden light adopts CREE led  
 Body and front cover made with CNC aluminum include aluminum spike  
 Adjustable fixture and assure the best heat dissipation.  
 Dimmable support with Triac/ PWM/ 1-10V/ Dali/ DMX512


### Product Specification

LED Chip	CREE LED/ EPISTAR (RGB)
Power	3W
Input	100-240VAC/ 24VDC
Lumen	210lm
CCT	3000K(30)/ 4000K(40)/ 6000K(60)
LED Qty	1 LED

### Technical Data

IP rating	IP65
Housing/ Front Cover	CNC Aluminum
Finishing	SLV(08)/ PAB(04)/ PSV(07)
Light Window	Tempered step glass
Power Cable	H05RN-F 2x0.75mm <sup>2</sup> /L=2mm (Low Voltage) H05RN-F 3x0.75mm <sup>2</sup> /L=2mm (High Voltage) H05RN-F 4x0.75mm <sup>2</sup> /L=2mm (RGB)
Mounting Part	Aluminum base/ Spike
Accessory Options	Glare Shield/ Grille/ Heightening pole

### 3W 3000K 10°

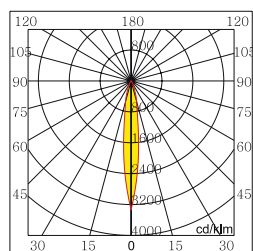

H[m]	D[m]	MaxLux	MedLux
0.40	0.09	1981	1205
0.80	0.19	495	301
1.20	0.28	220	134
1.60	0.38	124	75
2.00	0.47	79	48

### Photometric Data

CRI	80+
Luminous Efficacy	70lm/W
Beam Angle	6°(06)/ 8°(08)/ 10°(10)/ 15°(15)/ 25°(25)/ 45°(45)/ 60°(60)/ 90°(90)
Operating Temp	-20°C-+50°C

### Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL551014	SLV(08)	25°(25)	3000K(30)
WL551014.08.25.30			