
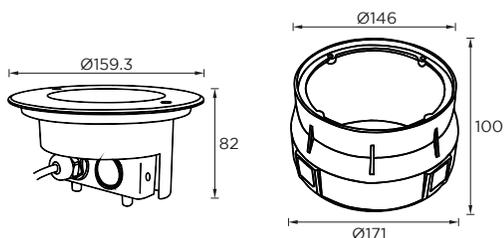


Art Number

WL881012

Model

24VDC RGBW 4 in 1



Features

Deliver light to permanent and semi-permanent installation such as side walks, large mature trees, walls and flagpoles.

Easy install in any hardscaping material and is designed to weather the elements, car tires and foot traffic.

RGB 3 in 1 available

Dimmable support: Triac. PWM/ 1-10V/ Dali/ DMX512

IP67 waterproof outdoor

Stainless steel front cover/ CNC aluminum lighting body

Incl. PVC mounting sleeve

Product Specification

LED Chip	CREE LED
Power	3x10W
Input	24VDC/ 240VAC
CCT	RGBW 4 IN 1(03)
LED Qty	3 LED

Technical Data

IP Rating	IP67
IK Rate	IK10
Housing/ Front Cover	Powder Coated aluminum/Stainless steel #316
Finishing	Stainless steel #316 (18)
Light Window	Tempered step glass
Power Cable	H05RN-F 5x0.75 mm ² / L=0.5m (RGBW PWM) H05RN-F 6x0.75 mm ² / L=0.5m (RGBW DMX)
Mounting Sleeve	PVC Plastic
Load Capacity	Full Area = 2600Kg-30Km/h
Weight	1.7Kg
Package	4pcs/CTN

Photometric Data

Beam Angle	15°(15)/ 30°(30)/ 45°(45) (Symmetric)
Operating Temp.	-20°C-+50°

Order Code Example

Artnumber	Finish	Beam Angle	Color Temp
WL881012	SS(09)	15°(15)	RGBW(03)
WL881012.09.15.30			