


Art Number
WL981029

Model
100-240VAC 50W

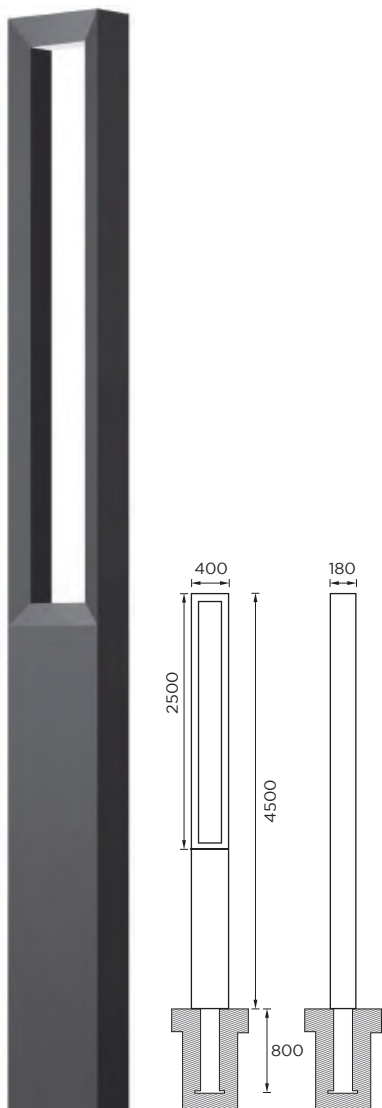

Features

LARRY series pole light adopt with Brand CREE LED as a light source
 Body made by good corrosion resistance aluminum alloy with the surface fluorocarbon paint treatment
 Translucent cover imported optical grade PC or PMMA material
 Anti ultraviolet corrosion resistant to high and low temperature
 Use stainless steel fastening screws and silicone rubber seal
 Whole pole made by high quality carbon structural hot dip galvanized steel with plastic sprayed surface or fluorocarbon paint processing.

Product Specification

| | |
|----------|--------------------------------------|
| LED Chip | CREE LED |
| Power | 50W |
| Input | 100-240VAC |
| Output | 5100lm(3K)/ 5355lm(4K)/ 5622lm(6.5K) |
| CCT | 3000K(30)/ 4000K(40)/ 6500K(65) |

Technical Data

| | |
|----------------------|--|
| IP Rating | IP65 |
| Housing/ Front Cover | Aluminum alloy |
| Finishing | Black(04), Grey(06) |
| Light Window | PC or PMMA material |
| Power Cable | H05RN-F 3x0.75 mm ² / L=0.5m (high voltage) |
| Fastening | Stainless steel screw |
| Pole material | Steel |
| Power Factor | >0.9 |

Photometric Data

| | |
|-------------------|------------|
| CRI | 80 |
| Luminous Efficacy | 102lm/W |
| Beam Angle | Radial (R) |
| Operating Temp. | -35°C~+55° |

Order Code Example

| | | | |
|------------------|--------|------------|------------|
| Artnumber | Finish | Beam Angle | Color Temp |
| WL981029 | BL(04) | Radial(R) | 3000K(30) |
| WL981029.04.R.30 | | | |